

XC2000/XE166 Family

AP16146

Pin Configuration, Power Supply and Reset

Application Note

V1.0 2009-09 08

Edition 2009-09 08

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

LEGAL DISCLAIMER

THE INFORMATION GIVEN IN THIS APPLICATION NOTE IS GIVEN AS A HINT FOR THE IMPLEMENTATION OF THE INFINEON TECHNOLOGIES COMPONENT ONLY AND SHALL NOT BE REGARDED AS ANY DESCRIPTION OR WARRANTY OF A CERTAIN FUNCTIONALITY, CONDITION OR QUALITY OF THE INFINEON TECHNOLOGIES COMPONENT. THE RECIPIENT OF THIS APPLICATION NOTE MUST VERIFY ANY FUNCTION DESCRIBED HEREIN IN THE REAL APPLICATION. INFINEON TECHNOLOGIES HEREBY DISCLAIMS ANY AND ALL WARRANTIES AND LIABILITIES OF ANY KIND (INCLUDING WITHOUT LIMITATION WARRANTIES OF NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF ANY THIRD PARTY) WITH RESPECT TO ANY AND ALL INFORMATION GIVEN IN THIS APPLICATION NOTE.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Device1

Revision History: V1.0, 2009-09 08

Previous Version: none

Page	Subjects (major changes since last revision)

We Listen to Your Comments

Is there any information in this document that you feel is wrong, unclear or missing?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

mcdocu.comments@infineon.com



Table of Contents

1	Introduction	5
2	How to do a basic configuration.....	6
2.1	Test	6
2.2	Power	6
2.3	RESET	6
2.4	Startup Mode	7
2.5	Start from internal flash.....	8
2.6	Debug configuration.....	10
3	Power supply	11
3.1	Single power supply.....	11
3.2	Dual power supply	12
4	Special Reset configurations.....	13
4.1	Using ESR pins to trigger a PORST reset.....	13
4.2	Using ESR pins for reset out delay (RSTOUT).....	15
5	Conclusion.....	16

1 Introduction

The XC2000/XE166 family from Infineon offers a new generation of 16-bit microcontrollers based on the high-performance C166S V2 core, with new features to reduce system costs.

This application note focuses on basic hardware related features such as EVR (Embedded Voltage Regulator), PORST (Power ON RESET) and the configuration of special function pins. This document covers the functionality of the following product families:

- XC22xxM, XC22xxN, XC22xxH
- XC23xxA, XC23xxB,
- XC27x5X, XC27x4X,
- XE166M, XE166N, XE166H

2 Basic Configuration

For correct operation, the connection of several pins must be considered:

- Test (/TRST, /TESTM)
- Power (VDDIM, VDDI1, VDDPA, VDDPB, VSS)
- Reset (/PORST, ESR0, ESR1, ESR2)
- Start-up (Port 10)

2.1 Test

The **/TESTM** pin enables factory test modes.

For normal operation **/TESTM** must be connected directly to VDDPB (Digital Pad Supply Voltage for Domain B).

After **/PORST**, the internal startup software uses the initial value of the **/TRST** pin to decide if normal internal startup, other startup modes, or a debug mode is to be initialized.

For normal operation, it should have a pull-down resistor to Vss (Digital Ground). A high level at this pin plus a rising edge of **/PORST**, activates the debug system or other startup modes.

2.2 Power

The device operates in the voltage range of 3.0V to 5.5V. The on-chip embedded voltage supply consists of two separated voltage regulators, **VDDIM** and **VDDI1**, generating the core voltage of 1.5V. Different power-down modes reduce or switch off the core voltages.

There are two groups of I/O pins, which can either be operated with the same voltage or with different voltages. For example the A/D conversion and some other pins, need 5 Volts, while an external data memory needs 3.3 Volts. In this case the pin **VDDPA** (Digital Pad Supply Voltage for Domain A) is connected to 5 Volts and the pins **VDDPB** (Digital Pad Supply Voltage for Domain B) are connected to 3.3 Volts.

The embedded voltage regulator is divided in domain M (pin **VDDIM**) and domain 1 (**VDDI1**). In low power mode, domain 1 can be switched off for power reduction. The **VDDIM** pin should be connected with a ceramic capacitor of at least 1µF. Do not overstep the maximum value of 4.7µF.

All **VDDI1** pins should be connected to each other. Each pin needs a 470nF ceramic capacitor. The maximum value of 2.2µF for each voltage domain 1 should not be overstepped.

2.3 RESET

The pins **/ESR0**, **/ESR1** and **/ESR2** can serve as an external reset input as well as a reset output (open drain) for Internal Application and Application Resets.

By default the reset functionality of **/ESR1** and **/ESR2** is disabled, and an internal weak pull-up resistor is active. There is no special recommendation for the configuration for these pins.

The **/ESR0** is configured by default as a bi-directional pin with pull-up device. The **/ESR0** pin serves as an external reset input as well as a reset output (open drain) for Application Reset and Internal Application Reset. After reset, a short reset pulse (~20µs) is generated. An internal weak pull-up resistor is then active for **/ESR0**.

To reduce the noise sensitivity of **/ESR0** it is recommended to use either a block capacitor (100nF) to ground, or use an additional pull-up resistor to tie the pin to **VDDPB**. The reset function of **/ESR0** can be disabled in the register **RSTCON1**. The System Reset is not supported.

The supply voltage **VDDPB** is monitored to validate the overall power supply. The supply watchdog detects ramp-up or ramp-down of the external supply voltage and generates a power-on reset. Thanks to this module, only a simple low cost (3 pin device) voltage regulator is required. Up to 16 selectable threshold levels, from 2.9 Volts to 5.5 Volts allow monitoring of the external power supply and generates an interrupt or reset if specified.

It is recommended to use a pull-up resistor to tie **/PORST** to **VDDPB**. If an additional power on reset is requested the **/PORST** pin must be driven low. **/PORST** is equipped with a noise suppression filter that suppresses glitches below 10ns pulse width. **/PORST** pulses with a width above 100ns are safely recognized.

2.4 Startup Mode

To enter the startup mode **Internal Flash**, the **/TRST** pin needs to be tied to ground. To select different startup modes such as UART/SPI/CAN Bootstrap Loader, or to select Debug Modes, the **/TRST** pin needs to be tied to **VDDPB** and some dedicated pins on **Port10** have to be configured. Typically these modes are used to program the internal flash. The different modes can be triggered after a power-on reset or an application reset:

Table 1 Startup Mode

Startup Mode	Configuration Pins							
	/TRST	P10 (6:0)						
Internal Start from Flash	0	x	x	x	x	x	x	x
UART Bootloader (TxD = P7.3, RxD = P7.4) ¹⁾	1	x	x	x	x	1	1	0
SPI Bootloader (MRST = P2.4, MTSR = P2.3, SCLK = 2.5, SLS = 2.6)	1	x	x	x	1	0	0	1
CAN Bootloader (RxD = P2.6, TxD = P2.5)	1	x	x	x	1	1	0	1
External Start	1	1	1	1	0	0	0	0

Table 2 Debug Modes

Debug Mode (Internal Start from Flash)	Configuration Pins							
	/TRST	P10 (6:0)						
JTAG Default mode (P2.9, P5.2, P5.4, P7.0)	1	x	x	x	x	1	1	1
JTAG pos.B (P10.9, P10.10, P10.11, P10.12)	1	x	x	x	x	0	1	1
JTAG pos.C (P7.0, P7.2, P7.3, P7.4) ¹⁾	1	1	0	0	0	0	0	0
JTAG pos.D (P8.3, P8.4, P8.5, P10.12) ¹⁾	1	1	0	1	0	0	0	0
DAP pos. 0 (P2.9, P7.0)	1	x	x	x	0	0	0	1
DAP pos. 1 (P10.9, P10.12)	1	x	x	x	x	1	0	0
DAP pos. 2 (P7.0, P7.4) ¹⁾	1	x	x	x	0	1	0	1

Note: Some modes allow the re-routing of debug functionalities.

Note: For all configuration modes please refer to the user manual.

Note: ¹⁾ Not available in 64 pin package

2.5 Start from Internal Flash

Figure 1 illustrates a possible configuration.

- The values for the oscillator circuit are dependent on the crystal type used.
- The “optional” resistors are required if the debug interface is used.

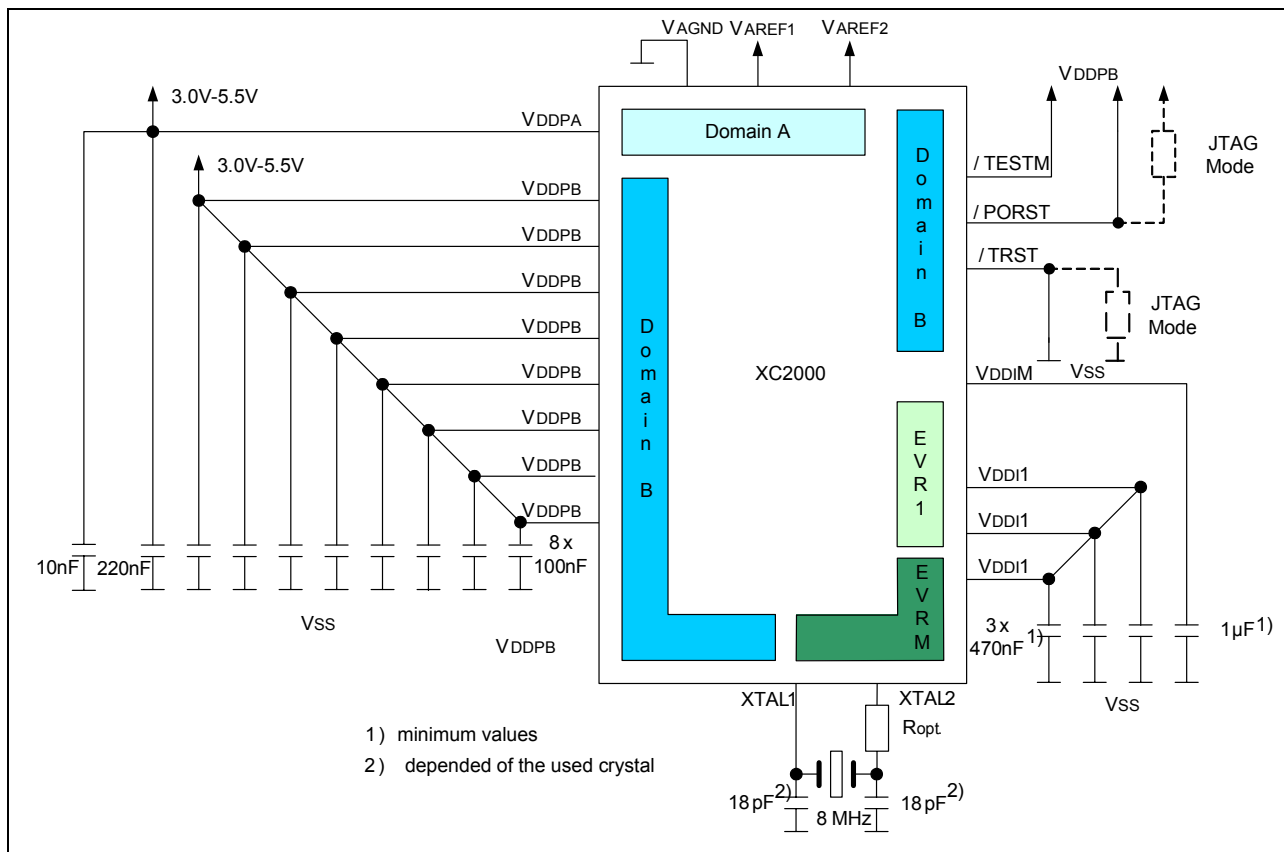


Figure 1 Start from Internal Flash

Table 3 Decoupling Capacitor List

Capacitor	Supply	Pins (QFP-144)	Pins (QFP-100)
100nF	VDDPB	2	2
100nF	VDDPB	36	25
100nF	VDDPB	38	27
100nF	VDDPB	72	50
100nF	VDDPB	74	52
100nF	VDDPB	108	75
100nF	VDDPB	110	77
100nF	VDDPB	144	100
$\geq 1 \mu\text{F}$	VDDIM	15	10
220nF	VDDPA	20	14
$\geq 470\text{nF}$	VDDI1	54	38
$\geq 470\text{nF}$	VDDI1	91	64
$\geq 470\text{nF}$	VDDI1	127	88

Note: For a better power dissipation, a package with an exposed pad is offered. To reach the minimum thermal resistance Junction-Ambient ($\leq 22\text{K/W}$), a 4-layer board with thermal vias should be used. The exposed pad needs to be soldered and tied to ground.

2.6 Debug Configuration

Figure 2 illustrates how a debug configuration can be realized. For configuration of a DAP (Device Access Port) interface, three pins are required. The debug mode becomes active after the rising edge of **/PORST** and with **/TRST = 1**.

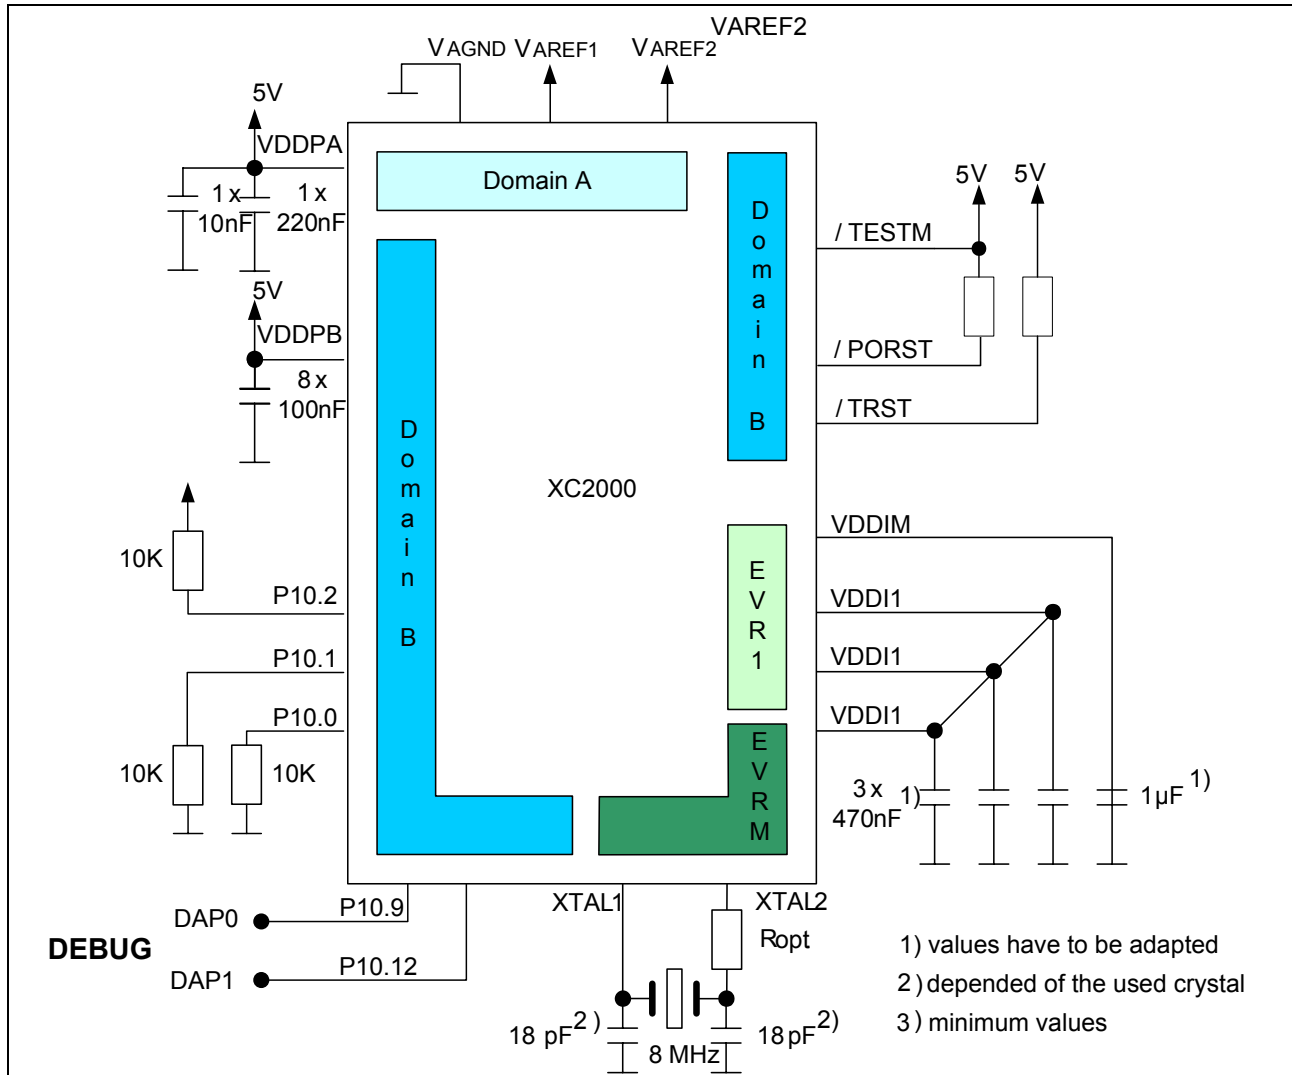


Figure 2 DAP Debug Configuration

3 Power Supply

Monitoring the external power supply allows the use of a low-cost regulator without additional status signals.

This chapter discusses the following items:

- Single power supply
- Dual power supply

3.1 Single Power Supply

Typically, most systems need only one power supply. With the embedded voltage regulator and the supply watchdog, a 3 pin low cost voltage regulator meets all requirements.

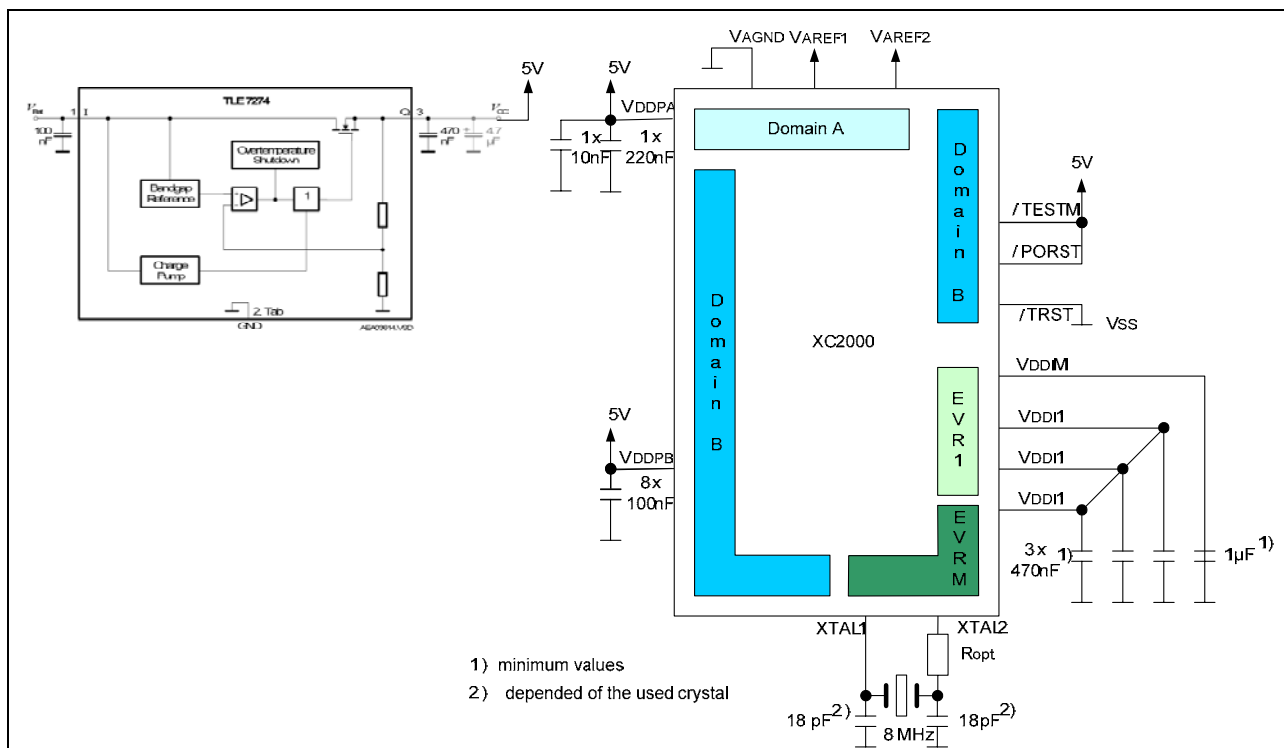


Figure 3 Single Power Supply using the TLE7274

The TLE 7274 is a monolithic integrated low-drop voltage regulator for load currents up to 300 mA. An input voltage up to 42 Volts is regulated to VQ, nom = 5.0 Volts, with a precision of $\pm 2\%$. The stand-by current consumption is typically 20 μ A. Therefore the device is dedicated for use in applications which are permanently connected to VBAT.

If the system can be switched off completely the TLE 7276 can be chosen. This voltage regulator has an additional control pin (Inhibit) that disables the 5 Volt supply.

4 Special Reset Configurations

4.1 Using ESR Pins to Trigger a PORST Reset

In some Application Software or Hardware states (TRAPS or exceptional hardware events), a Power on Reset is required. Since the XC2000/XE166 can not trigger a **PORST** via software or internal Hardware, an external connection must be used.

The ESR pins serve as multi-functional pins with a wide range of different options, such as reset input/output. After power-on, **ESR0** is configured as reset input for an internal application reset in open drain mode. **ESR0** drives an active low signal after power-on for the time the internal reset counter is running (see Figure 6). For this reason **ESR0** can not be directly connected to the **/PORST** pin.

ESR1 and **ESR2** are configured after start-up as normal input pins, pull-up device activated. One of the two pins could be connected directly to the **/PORST** pin (Figure 5). To trigger a **PORST** the register **ESRCFG1** or **ESRCFG2** of the respective ESR pin needs to be written with the corresponding value for reset output drives; a 0 for an Internal Application or Application Reset in open drain mode. The Reset counter **RSTCNTA** in register **RSTCNTCON** should be set to the maximum value.

The ESR pin could also be used as an I/O pin, so that Software could trigger a PORST by setting the respective ESR pin to 0 to achieve a proper external reset pulse outside. If the Watchdog Timer (WDT) should trigger a PORST, the **ESRCFGx** register needs to be setup for the same type of reset as the WDT.

In some Applications with a higher Safety level, an external Supply Watchdog is used. Figure 5 shows that the **/RESETIN** of the Supply Watchdog can be used to trigger a PORST.

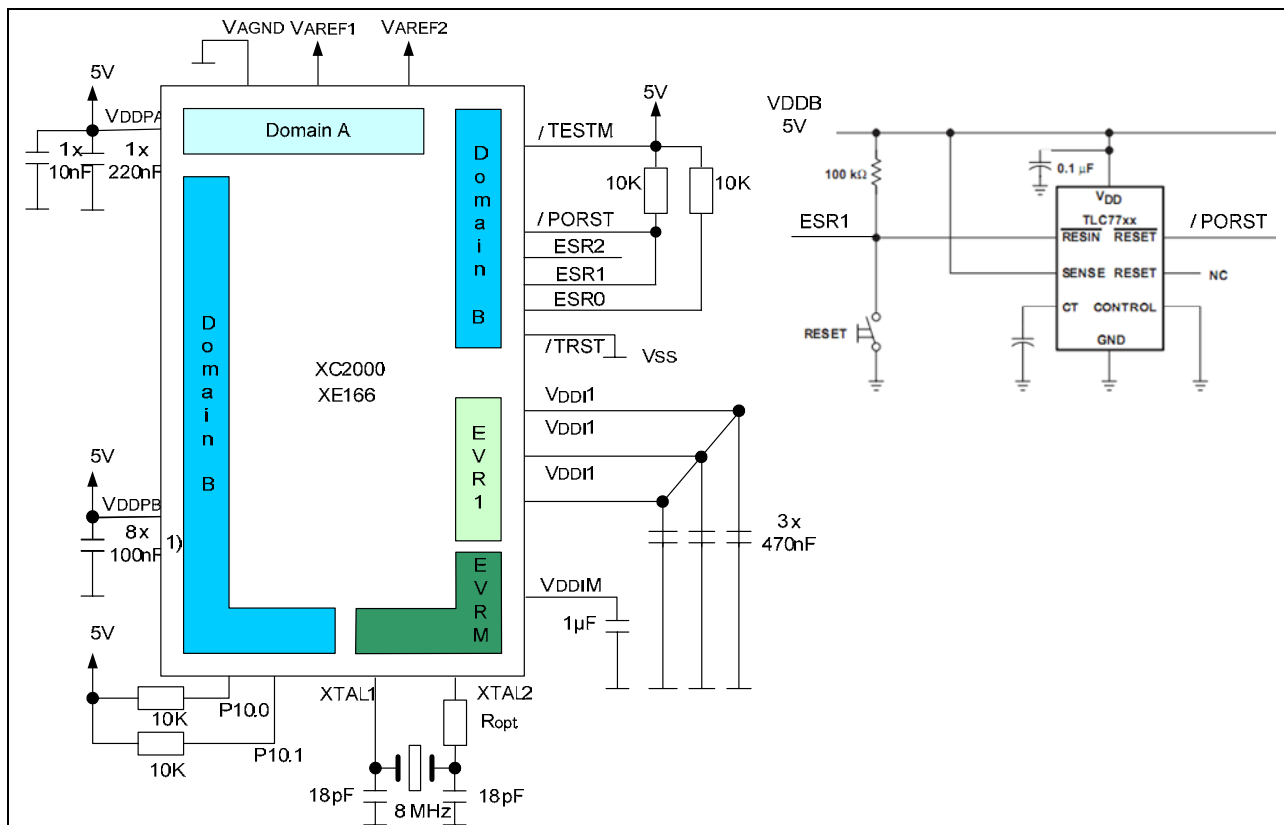


Figure 5 Trigger a PORST with the ESR1 Pin

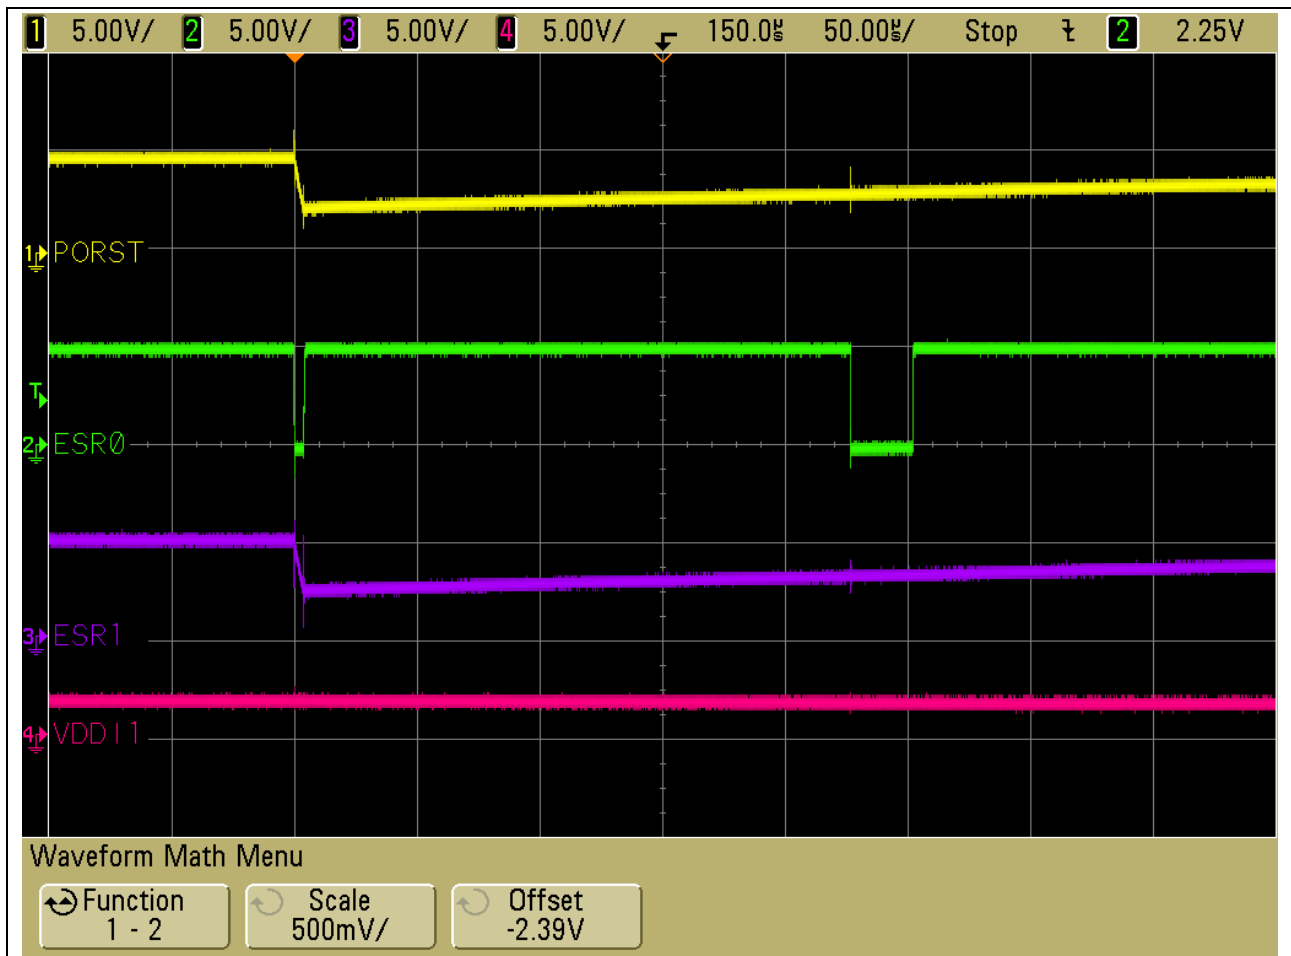


Figure 6 Trigger a PORST with the ESR1 Pin

Figure 6 show the ESR1 driving a low level during the WDT (WatchDog Timer) reset on the PORST pin. If the power-on reset is detected by the PORST pin, the ESR Pins switch to inactive. The internal EVR are reset and the device boots up.

On the **ESR0** pin the short reset pulse ($\sim 20\mu\text{s}$) is generated. An internal weak pull-up resistor is then active.

4.2 Using the ESR Pins to Generate a Reset Out (RSTOUT) Delay

Some Applications require a reset out signal together with a reset out delay after power-up, as long as the initialization is complete. The XC166 family had a special pin for this function, the **RSTOUT** pin (Figure 7). The new XC2000/XE166 offers a wide range of reset functions but can also still be used in the same way as originally used in the XC166 16Bit family.

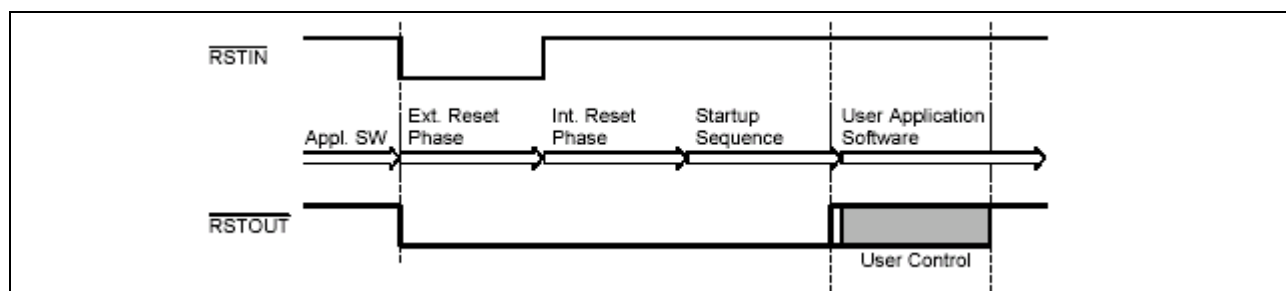


Figure 7 RESET Out of XC166 Family

The ESR pins serve as multi-functional pins with a wide range of different options, such as reset input/output. **ESR0** is configured as reset input (active low) after power-up. For this reason **ESR0** can not be used as the **RSTOUT** signal.

ESR1 and **ESR2** are configured after start-up as normal input pins, pull-up device activated. One of these pins can be used together with an external pull-down, to hold the signal at a low level. Later in the application software, the pin can be switched to push-pull output driving a high level. In Figure 8, the **SCU_ESRCFG1** was written with a 0x000A; at the end of system init.

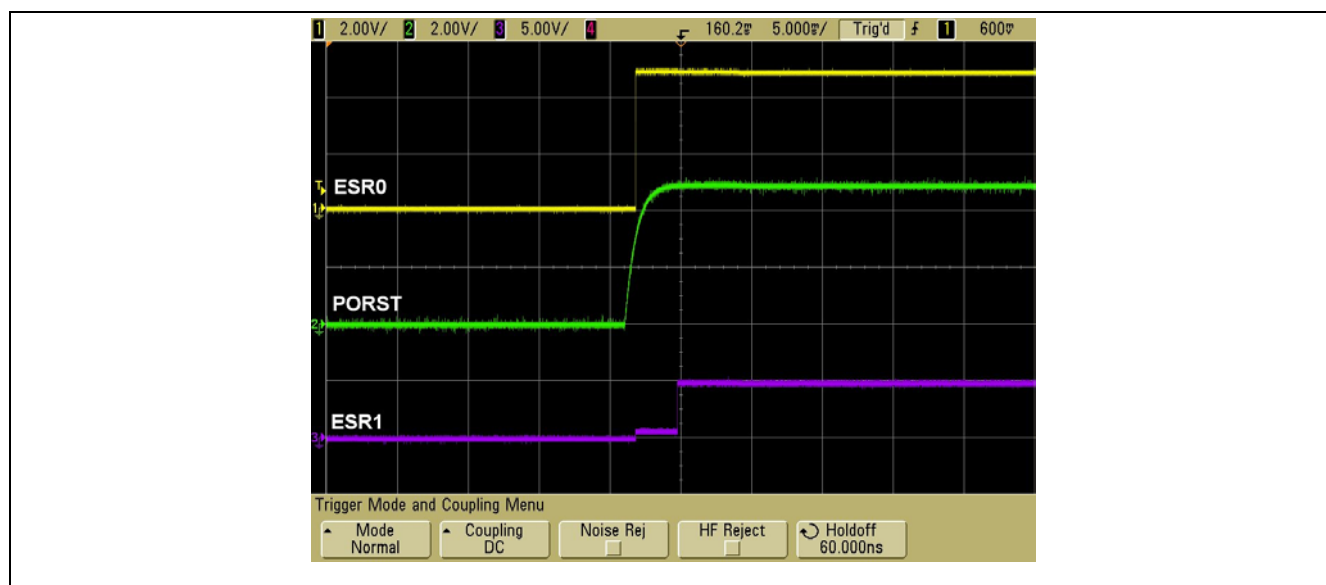


Figure 8 ESR1 as Reset Out Signal with Reset Out Delay after Power-up

5 Conclusion

The XC2000/XE166 family supports several powerful mechanisms to address different application scenarios, such as an embedded voltage regulator, power-on reset, two independent voltage domains and a supply watchdog.

Through the product 'family' concept, Infineon is able to offer a wide range of different devices to meet the diverse requirements in the market today and in the future.

www.infineon.com