



3.3V regulator




RTC Battery



KEY




LED

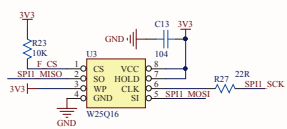

FLASH-W25Q16



NRF2401 I/F

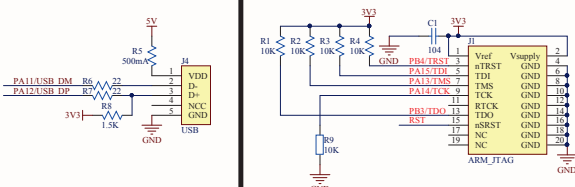








STM32-USB Slave I/F

STM32F407ZET6

RAM: 192K


FLASH: 512K

Frequency: 168MHz

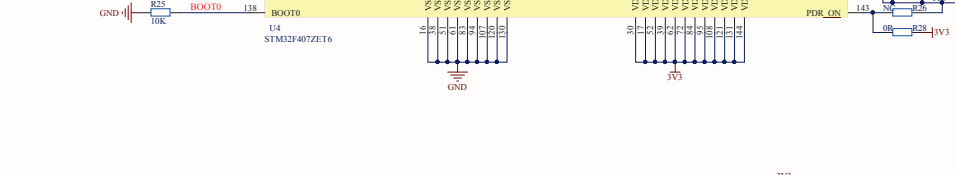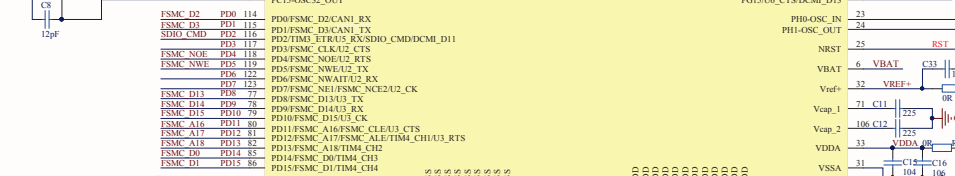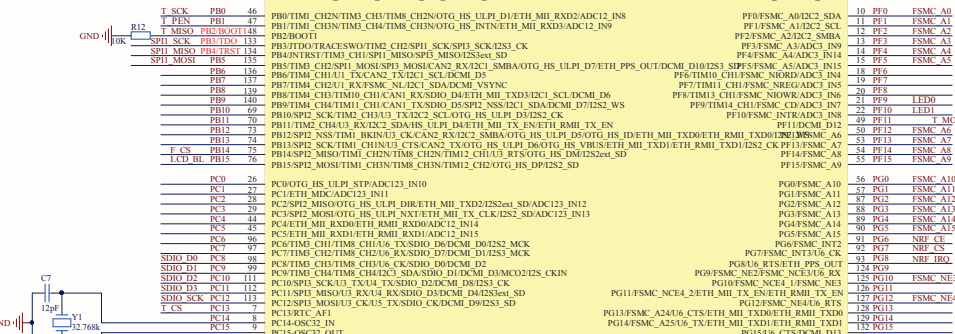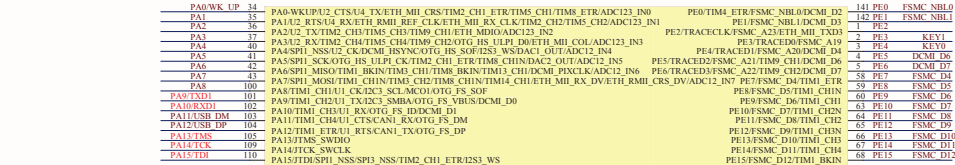


ISP Serial I/F


BOOT0	BOOT1	boot mode
0	0/1	user Flash(default)
0	1	ISP mode
1	1	内部RAM

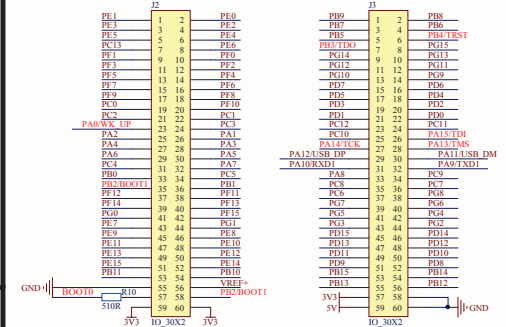


extend I/O

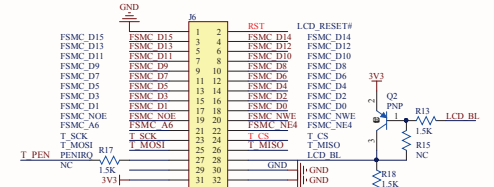

TFT I/F

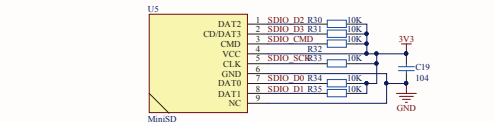

TF-SD

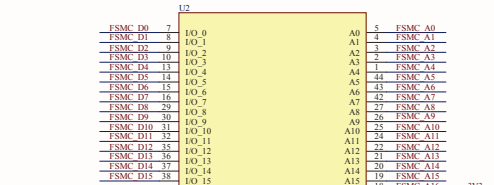

SDRAM

Title	Number	Revision
File: C:\Documents and Settings\STM32_F407ZET6\...	2015-9-30	Sheet of 4