


Estimated parameters (per solenoid)

	Min	Typ	Max
Quality factor	20.28		115.87
Inductance / mH		14.62	
Resistance / Ohm		3.17	
Thermal noise / nV(rms)		13.87	
Wire length / m		160	

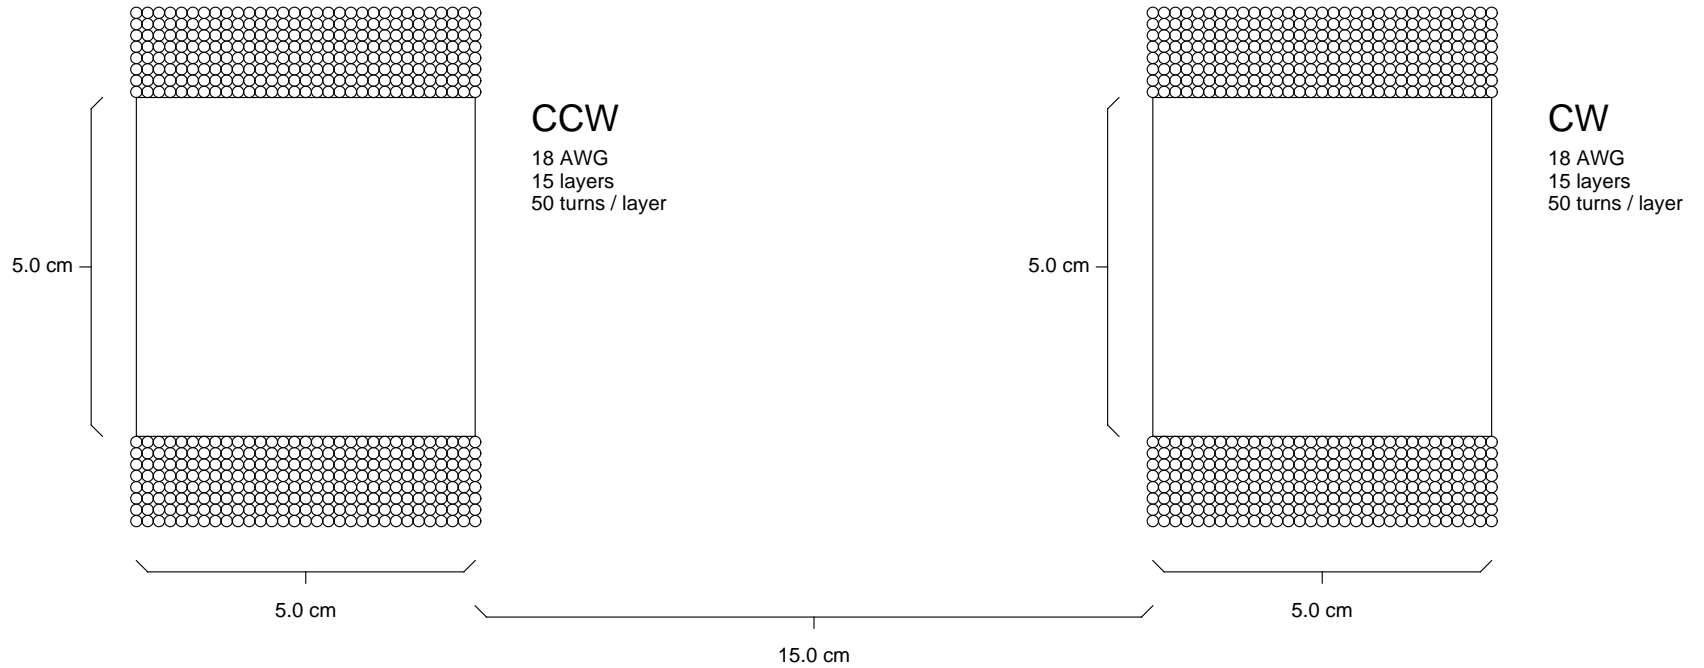

NOTE: All frequency-dependent values are based on a bandwidth from 700 Hz – 4 kHz

TITLE **COIL: Double-solenoid sensor coil**

FILE: 01-coil.sch

REVISION: 2.0

PAGE 1 OF 1

DRAWN BY: Bradley Worley